

FIG. 2

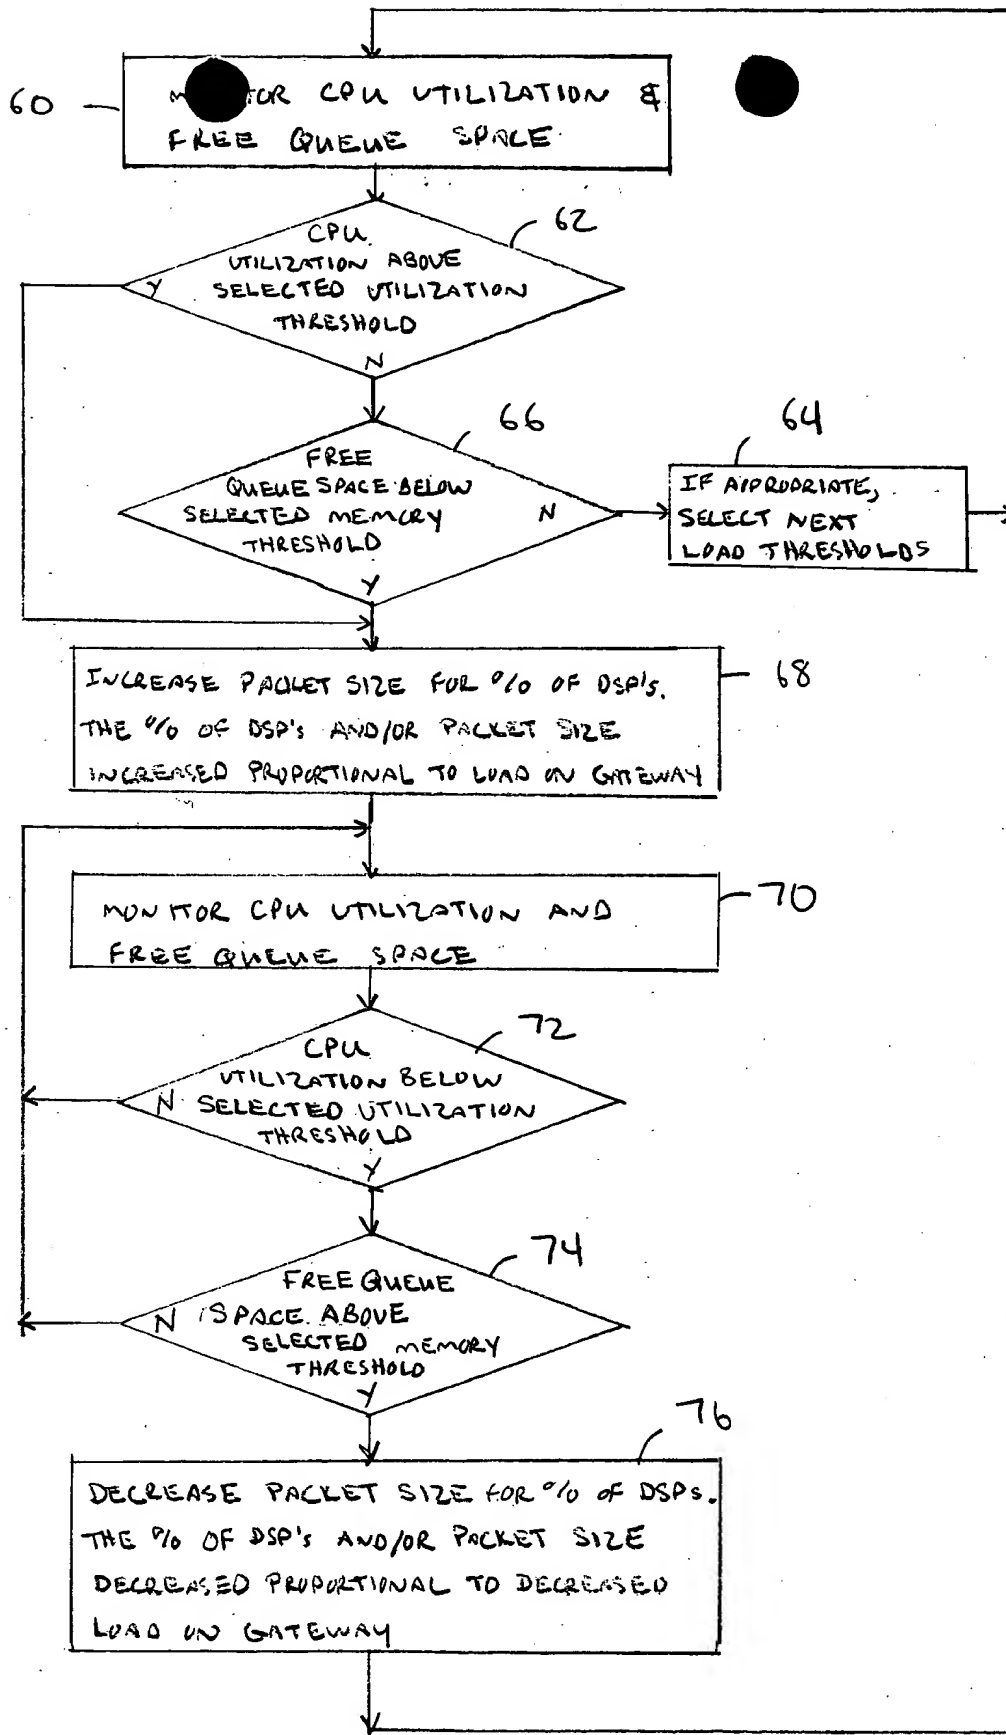



FIG. 3

66997-1-10000

AVAILABLE VOICE GATEWAY CAPACITY = HIGH OR MEDIUM

VOIP PACKET


80 →



20 BYTES 8 BYTES 12 BYTES 20 BYTES
(ms)

82 →


AVAILABLE VOICE GATEWAY CAPACITY = LOW



20 BYTES 8 BYTES 12 BYTES 40 BYTES
(40 ms)

84 →

AVAILABLE VOICE GATEWAY CAPACITY = VERY LOW
OR
ZERO



20 BYTES 8 BYTES 12 BYTES 100 + BYTES
(100 + ms)

FIG. 4